

Palletweger WILA PX (ijkwaardig) M

Stalen palletweger met vier RVS IP68 loadcells en met indicator kolom.



Eigenschappen

- Materiaal: gelakt staal
- 2 wielen en handvat voor verplaatsen
- Loadcells: Roestvrij staal 420, IP68 (optioneel : IPX9K)
- In hoogte verstelbare voetjes, gegalvaniseerd
- 5 m kabel tussen junction box en indicator
- RVS verrijdbare kolom diam. 38mm, h 700 mm

(1) WILA HDRIP675Y



WILA STAVT



INTERN GEBRUIK (n.v.h.)

Code artikel	Weegvermogen	Indeling	Afmetingen	Indicator	Gewicht
WILA PXA0D (1)	1500 kg / 3000 kg	e=100 g / 200 g	1200x840x h 95 mm	WILA WET	61 kg

Geijkt CE-M M

Code artikel	Weegvermogen	Indeling	Afmetingen	Indicator	Gewicht
WILA PXA1D (1)	1500 kg / 3000 kg	e=0,5 kg / 1 kg	1200x840x h 95 mm	WILA WET	61 kg

Geijkt CE-M M Multi range

Code artikel	Weegvermogen	Indeling	Afmetingen	Indicator	Gewicht
WILA PXC2D	Max1=1500 kg / Max2=3000 kg	e1=0,5 kg / e2=1 kg	1200x840x h 95 mm	WILA WML	61 kg


Opties:

- WILA STAVT printer
- * IPX9K: Conformiteitsverklaring + IPX9K bescherming voor 4 loadcells
- (1) afstandsdisplay 6 cijfers (hoogte 75mm)



* Water protection when cleaning high pressure / steam jet (Test: pressurized hot water is sprayed on the body of the load cell from a distance of 150 mm; at the end of the test, cell load should not be damaged). Water pressure 100 bar. Water temperature 80 ° C. Test duration 250 seconds (Reference standard DIN 40050-9).

Dimensions (mm)

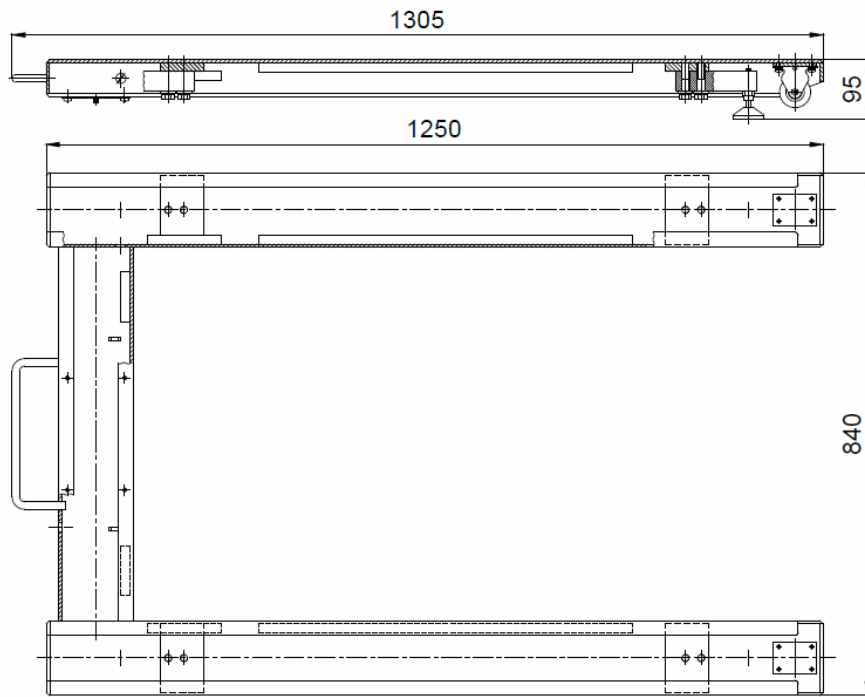

PX weight= 57 kg
PXI weight= 61 kg