


Vloerweegschaal PI (ijkwaardig) **M**

Roestvrij stalen 304 weegplateau met vier RVS IP68 loadcells.

Eigenschappen


- Materiaal plateau: Roestvrij staal 304
- Afwerking oppervlak: gepolijst en geborsteld
- Loadcells: Roestvrij staal 17-4 PH (optioneel : IPX9K)
- Verstelbare, zelfcenterende voetjes, RVS 304
- 5 m kabel tussen IP67 RVS junction box en indicator

Indicator: **WEI / WINOXR**


Op aanvraag: **ATEX**  **II 3 GD (zone 2, 22) versie**

Opties

Zie datasheet 'opties voor PI series'

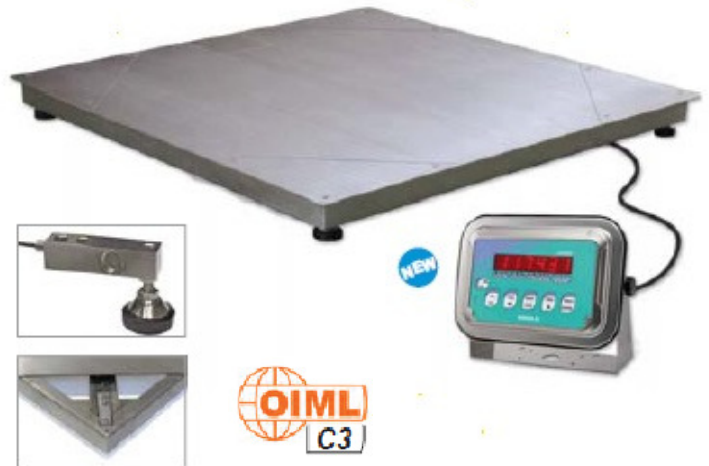



Op verzoek:





* Water protection when cleaning high pressure / steam jet (Test: pressurized hot water is sprayed on the body of the load cell from a distance of 150 mm; at the end of the test, cell load should not be damaged). Water pressure 100 bar. Water temperature 80 ° C. Test duration 250 seconds (Reference standard DIN 40050-9).

INTERN GEBRUIK (n.v.h.)


Code artikel	Weegvermogen	Indeling	Afmetingen	Eigen gew.	Indicator
PI1250B0AS5 (1-7)	1500 kg	e=100 g	1250x1250 mm	84 kg	WEI (IP67)
PI1500B0AS5 (1-8)	1500 kg	e=100 g	1500x1500 mm	124 kg	
PI1250B0A (1-7)	3000 kg	e=200 g	1250x1250 mm	84 kg	
PI1500B0A (1-8)	3000 kg	e=200 g	1500x1500 mm	124 kg	
Code artikel	Weegvermogen	Indeling	Afmetingen	Eigen gew.	
PI1250E0AS5 (2-3-4-5-7)	1500 kg	e=100 g	1250x1250 mm	84 kg	WINOXR (IP68)
PI1500E0AS5 (2-3-4-5-8)	1500 kg	e=100 g	1500x1500 mm	124 kg	
PI1250E0A (2-3-4-5-7)	3000 kg	e=200 g	1250x1250 mm	84 kg	
PI1500E0A (2-3-4-5-8)	3000 kg	e=200 g	1500x1500 mm	124 kg	

CE-M Geijkt M

Code artikel	Weegvermogen	Indeling	Afmetingen	Eigen gew.		Indicator
PI1250B1AS5 (1-7)	1500 kg	e=0.5 kg	1250x1250 mm	84 kg		WEI (IP67)
PI1500B1AS5 (1-8)	1500 kg	e=0.5 kg	1500x1500 mm	124 kg		
PI1250B1A (1-7)	3000 kg	e=1 kg	1250x1250 mm	84 kg		
PI1500B1A (1-8)	3000 kg	e=1 kg	1500x1500 mm	124 kg		

Code artikel	Weegvermogen	Indeling	Afmetingen	Eigen gew.		Indicator
PI1250E1AS5 (2-3-4-5-6-7)	1500 kg	e=0.5 kg	1250x1250 mm	84 kg		WINOXR (IP68)
PI1500E1AS5 (2-3-4-5-6-8)	1500 kg	e=0.5 kg	1500x1500 mm	124 kg		
PI1250E1A (2-3-4-5-6-7)	3000 kg	e=1 kg	1250x1250 mm	84 kg		
PI1500E1A (2-3-4-5-6-8)	3000 kg	e=1 kg	1500x1500 mm	124 kg		

CE-M Geijkt M Multi range

Code artikel	Weegvermogen	Indeling	Afmetingen	Eigen gew.		Indicator
PI1250E2AS5 (2-3-4-5-6-7)	Max1=600 kg Max2=1500 kg	e1=0.2 kg e2=0.5 kg	1250x1250 mm	84 kg		WINOXR (IP68)
PI1500E2AS5 (2-3-4-5-6-8)	Max1=600 kg Max2=1500 kg	e1=0.2 kg e2=0.5 kg	1500x1500 mm	124 kg		
PI1250E2A (2-3-4-5-6-7)	Max1=1500 kg Max2=3000 kg	e1=0.5 kg e2=1 kg	1250x1250 mm	84 kg		
PI1500E2A (2-3-4-5-6-8)	Max1=1500 kg Max2=3000 kg	e1=0.5 kg e2=1 kg	1500x1500 mm	124 kg		